

VERTICAL GREASE SEPARATOR <1000 PE
MODEL: CVC-CG


Function:

- Separation of organic oils and grease (vegetal and animal grease) from water thanks to the density difference. Does not separate emulsified substances.

NOTICE: To eliminate non organic oils and greases and mineral oils, please refer to the chapter: Hydrocarbon Separators.

Characteristics:

- Manufactured by Salher, Model CVC-CG.
- Chamber made of Fiberglass Reinforced Polyester (FGRP) with orthophthalic resin.
- Manual removal of oils and greases through manhole with cover in FGRP.
- PVC outlet and inlet pipes. Connector in the manhole to install an air vent.
- Possibility to add bacteria to reduce or remove greases.
- Option: oils and greases detection alarm.

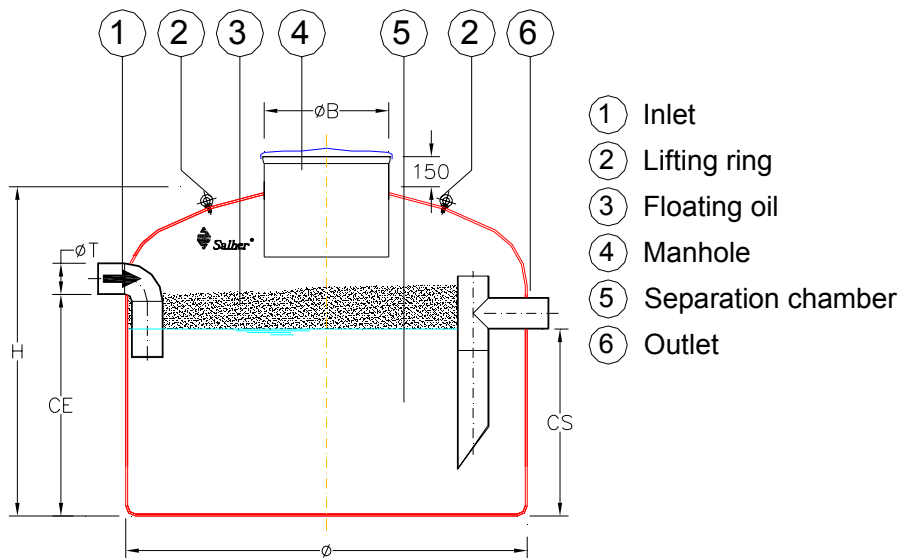

- ① Inlet
- ② Lifting ring
- ③ Floating oil
- ④ Manhole
- ⑤ Separation chamber
- ⑥ Outlet

CAPACITY [liters]	Ø [mm]	H [mm]	Ø MANHOLE [mm]	Ø PIPE [mm]	CE [mm]	CS [mm]
1.500	1.400	1.200	400	160	850	800
2.000	1.400	1.440	500	200	1.270	1.220
3.000	1.700	1.490	620	200	1.050	950
4.000	1.700	1.930	620	250	1.480	1.380
5.000	2.000	1.800	620	250	1.550	1.450
6.000	2.000	2.110	620	315	1.580	1.480
7.000	2.000	2.430	620	315	1.900	1.800
8.000	2.000	2.750	620	315	2.210	2.100
9.000	2.500	2.080	620	315	1.430	1.330
10.000	2.500	2.280	620	315	1.630	1.530
11.100	2.500	2.490	620	315	1.900	1.700