
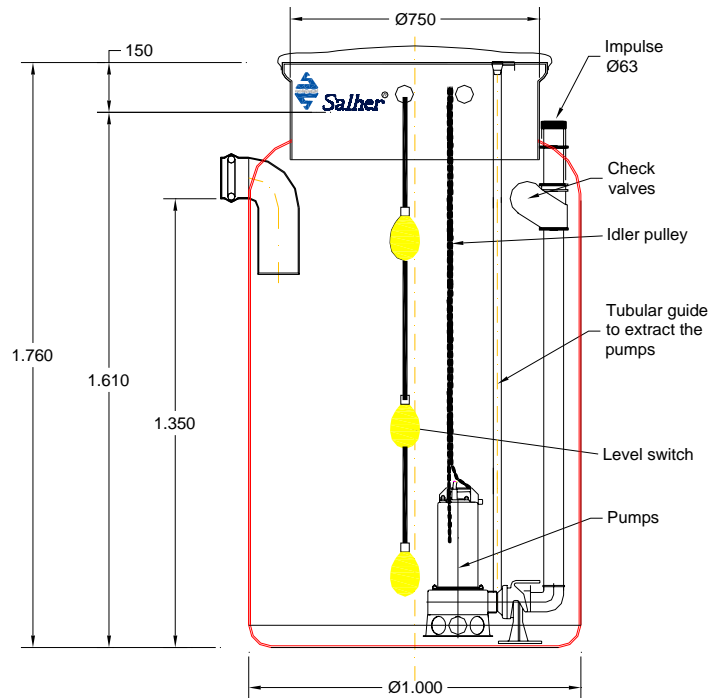


MINI STATION
MODEL: CVC-PB-A

Pumping stations for small flows.

The CVC-PB-A-1 model has only one monophasic pump, with built-in level regulator.

For the other models, the basic model include a body made of FiberGlass Reinforced Polyester (FGRP), 2 pumps with alternate mechanism, 4 level regulators, check valves and lock valves. The pumps are automatically connected to the idler pulley.

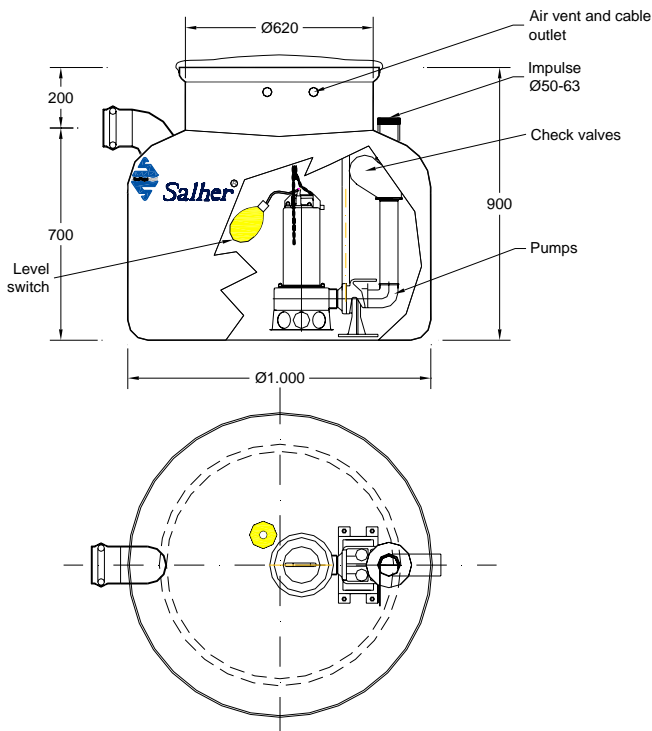

MODEL	Total capacity (liters)	Effective capacity (liters)	Pump models	Pumps Units/kW/ voltage	Ø	Height
CVC-PB-A-1	500	470	1	1 x 0,5 Kw II	1.000	900
CVC-PB-A-2	1.200	1.060	2	2x 0,6 Kw III	1.000	1.760
CVC-PB-A-3	1.200	1.060	3	2 x 0,9 Kw III	1.000	1.760

PUMPS CHARACTERISTICS: VORTEX IMPULSER

PUMPS	Nominal power (Kw)	Tens. (V)	Intensivity (A)	Flow												Ø Solid pass.		
				L/min	0	50	100	150	200	250	300	400	500	550	600		650	700
				M3/h	0	3	6	9	12	15	18	24	30	33	36		39	42
1	0,5	230V	3,15	M.C.A	8	6,5	5,2	3,4	2	0,2							40	
2	0,6	400V	1,55		9	7,7	6,4	5	3,8	2,3	1						40	
3	0,9	400V	2,30		11	10	9	7,8	6,3	5	3,8	1					40	