


MEDIUM CAPACITY STATION

MODEL: CVC-PB-A

Pumping stations for small flushing

A basic model consists of a case made of Fiberglass Reinforced Polyester (FGRP), 2 pumps operating alternately, 4 level regulators, emergency valve and shutting-off valve. The automatic coupling for the pumps lifts when the deposit is full.

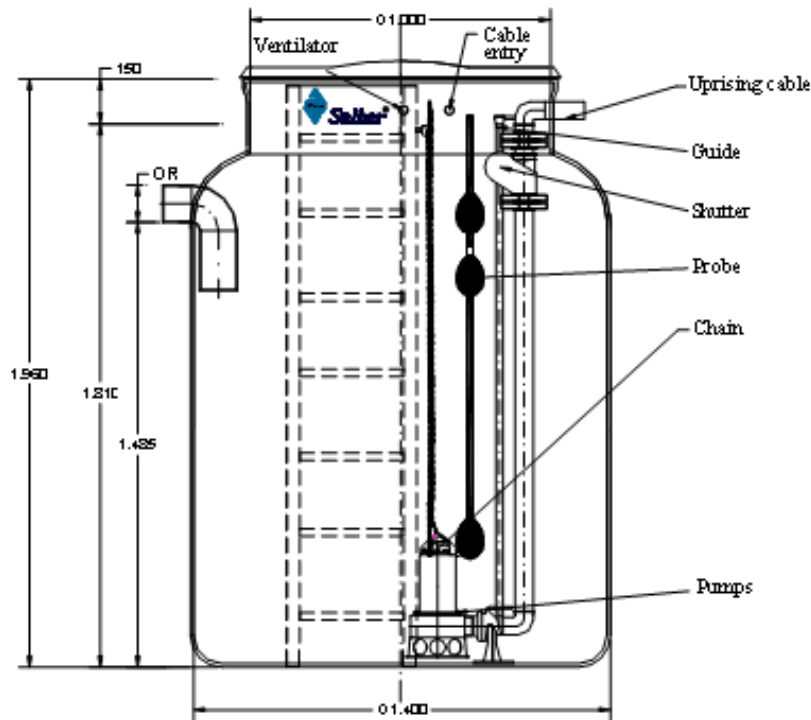

MODEL.	Total capacity (liters)	Effective Capacity (Liters)	Pumps Models	Pumps No./Kw/Voltage	Ø	Height
CVC-PB-A-4	2.500	2.000	4	2x 1,2 Kw III	1.400	1.760
CVC-PB-A-5	2.500	2.000	5	2x 1,3 Kw III	1.400	1.760
CVC-PB-A-6	2.500	2.000	6	2x 3,2 Kw III	1.400	1.760

PUMPS CHARACTERISTICS: VORTEX IMPULSER

PUMPS	Nom. power (Kw)	Tens. (V)	Intensity (A)	Flow														Ø Solid pass.
				L/min	0	50	100	150	200	250	300	400	500	550	600	650	700	
				M3/h	0	3	6	9	12	15	18	24	30	33	36	39	42	
4	1.2	400V	2.7	M.C.A	12.5	11.8	10.8	9.8	8.5	7	5.5	2					40	
5	1.3	400V	3		13.2	12.8	12.2	11.3	10.3	9.3	8	5.5	3	1.8			50	
6	3.2	400V	5.5		18.2	17.3	16.5	15.6	14.7	13.6	12.7	10.5	8	7	5.5	4	3	50