


MEDIUM CAPACITY STATION
MODEL: CVC-PB-B

Pumping stations for small and medium flushing.

A basic model consists of a case made of FiberGlass Reinforced Polyester (FGRP), 2 pumps operating alternately, 4 level regulators, emergency valve and shutting-off valve. The automatic coupling for the pumps its lifting when the deposit is full. Electrical panel. In option any accessories are available.

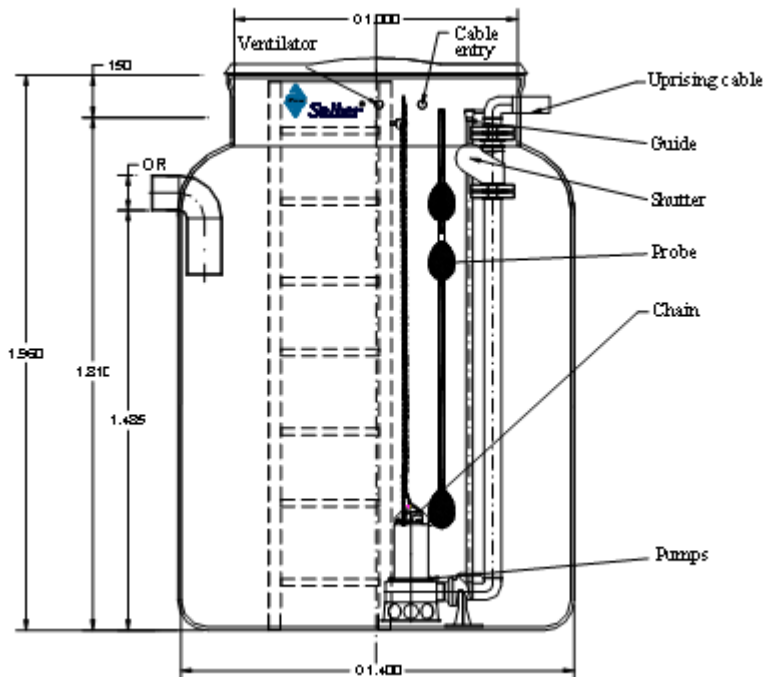

MODEL	Total Capacity (Liters)	Effective Capacity (Liters)	Pump Model	Pumps No./Kw/Voltage	Ø	Height
CVC-PB-B-7	2.600	2.285	7	2x 1,1 Kw III	1.400	1.960
CVC-PB-B-8	2.600	2.285	8	2x 1,5 Kw III	1.400	1.960
CVC-PB-B-9	2.600	2.285	9	2x 2,2 Kw III	1.400	1.960

PUMPS CHARACTERISTICS: VORTEX IMPULSER

PUMPS	Nominal Power (Kw)	Tens. (V)	Intensity (A)	Flow										Ø Solids pass.
				L/min	100	200	300	400	500	600	700	800	900	
				M3/h	6	12	18	24	30	36	42	48	54	
7	1.1	400V	2.8	M.C.A	13,1	11,3	9,5	7,7	5,9	4,2	2,4			50
8	1.5	400V	3.6		16,6	15	13,3	11,4	9,5	7,5	5,4	3,3		50
9	2.2	400V	5.0		20	18,3	16,6	15,1	13,3	11,3	9,3	7,2	5	50