


HIGH CAPACITY STATION
MODEL: CVC-PB-C

Pumping stations for small and medium flushing.

A basic model consists of a case made of FiberGlass Reinforced Polyester (FGRP), 2 pumps operating alternately, 4 level regulators, emergency valve and shutting-off valve. The automatic coupling for the pumps lifts when the deposit is full. Electrical panel. In option any accessories are available.

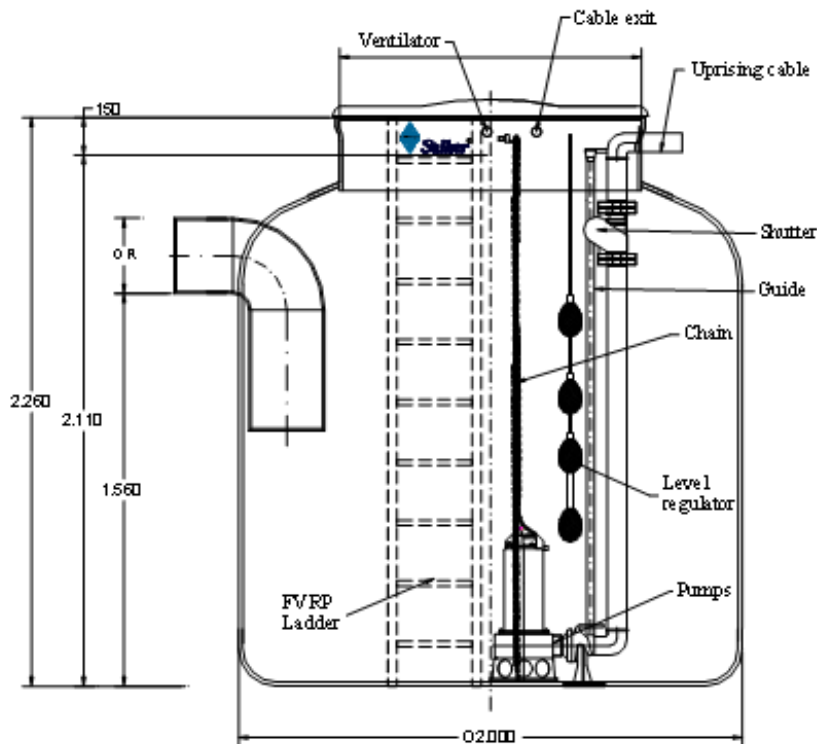

MODEL	Total Capacity (Liters)	Effective Capacity (Liters)	Pump Model	Pumps No./Kw/Voltage	Ø	Height
CVC-PB-C-10	6.050	4.900	8	2x 2,2 Kw III	2.000	2.260
CVC-PB-C-11	6.050	4.900	9	2x 4 Kw III	2.000	2.260
CVC-PB-C-12	6.050	4.900	10	2x 5,5 Kw III	2.000	2.260

PUMPS CHARACTERISTICS: VORTEX IMPULSER

PUMPS	Nominal power (Kw)	Tens. (V)	Intensity (A)	Flow								Ø Solids pass.	
				L/min	0	4	8	12	16	20	24		28
				M3/h	0	14,4	28,8	43,2	57,6	72	86,4		100,8
10	2,2	400V	M.C.A	17	14	12,2	9,6	6,2	2		-	50	
11	4	400V		20,5	18,2	16	13	10	6,5		-	50	
12	5,5	400V		24,5	22,5	20,8	17	14,9	11,5	8,5	-	50	