


MAXI CAPACITY STATIONS
REF: CVC-PB-D

Pumping station for waste and rainy water.

A basic model consists of a case made of FiberGlass Reinforced Polyester (FGRP), 2 pumps operating alternately, 4 level regulators, emergency valve and shutting-off valve. The automatic coupling for the pumps enables its lifting when the deposit is full. Electrical panel. In option any accessories are available.

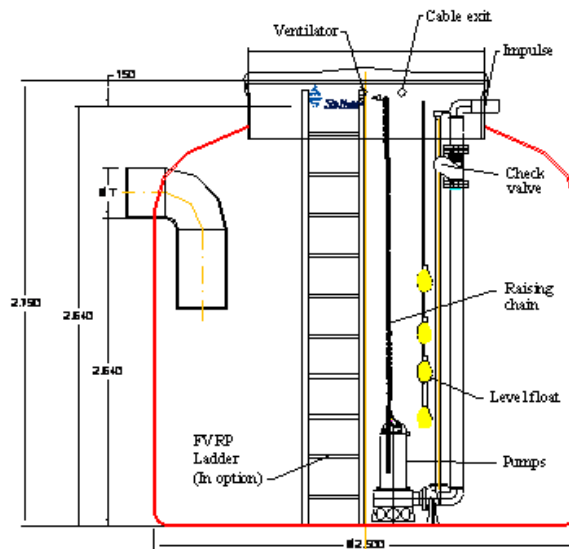

| MODELS | Total Capacity (Liters) | Effective Capacity (Liters) | Pump Models | Pumps | Ø [mm] | Height [mm] |
|-------------|-------------------------|-----------------------------|-------------|------------|--------|-------------|
| CVC-PB-D-13 | 11.800 | 9.800 | 13 | 5,5 Kw III | 2.500 | 2.790 |
| CVC-PB-D-14 | 11.800 | 9.800 | 14 | 7,5 Kw III | 2.500 | 2.790 |
| CVC-PB-D-15 | 11.800 | 9.800 | 15 | 11 Kw III | 2.500 | 2.790 |
| CVC-PB-D-16 | 11.800 | 9.800 | 16 | 15 kW III | 2.500 | 2.790 |

PUMPS CHARACTERISTICS: VORTEX IMPULSER

| PUMPS | Nom. power (Kw) | Tens. (V) | Intensity (A) | Flow | | | | | | | | | | | Ø Solid pass. | |
|-------|-----------------|-----------|---------------|-------|------|-----|-------|-------|-------|-------|-------|-------|-------|-------|---------------|-------|
| | | | | L/min | 340 | 680 | 1.000 | 1.350 | 1.700 | 2.000 | 2.500 | 3.000 | 3.400 | 4.200 | | 5.000 |
| | | | | M3/h | 20 | 40 | 60 | 80 | 100 | 120 | 150 | 180 | 200 | 250 | | 300 |
| 13 | 5,5 | 400V | 12,6 | M.C.A | 10,7 | 9,8 | 9,1 | 8,4 | 7,6 | 6,5 | | | | | | 98 |
| 14 | 7,5 | 400V | 16,9 | | | | 13,1 | 12,3 | 11,5 | 10,6 | 9,8 | | | | | 98 |
| 15 | 11 | 400V | 22,8 | | | | 16,2 | 15,2 | 14,2 | 13,4 | 12,5 | 11,1 | 9,8 | | | 100 |
| 16 | 15 | 400V | 30,0 | | | | 19,4 | 18,5 | 17,7 | 16,8 | 15,8 | 14,4 | 13 | 12,1 | | 100 |